
Service and Repair

Apron Molding Sun Roof, Replacement

NOTE: The illustrations in this service information are used for different model years and/or models. Some variation may occur. However, the essential information in the illustrations is always correct.

Removing the apron molding for the sun roof

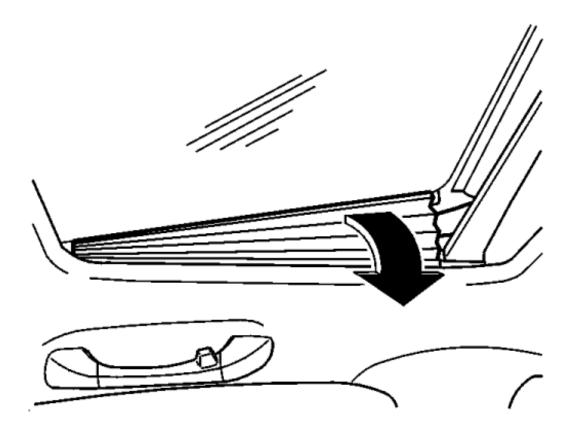

- * The sun roof must be in the half open position.
- * Pull the apron molding inwards into the car.
- * Detach the upper edge of the apron molding.
- * Unhook the lower edge of the apron molding.
- * Remove the apron molding.

Installing apron molding for the sun roof Hook the apron molding into place at the top and bottom edges.