



## Service and Repair Power Seat Switch

### Side Panel

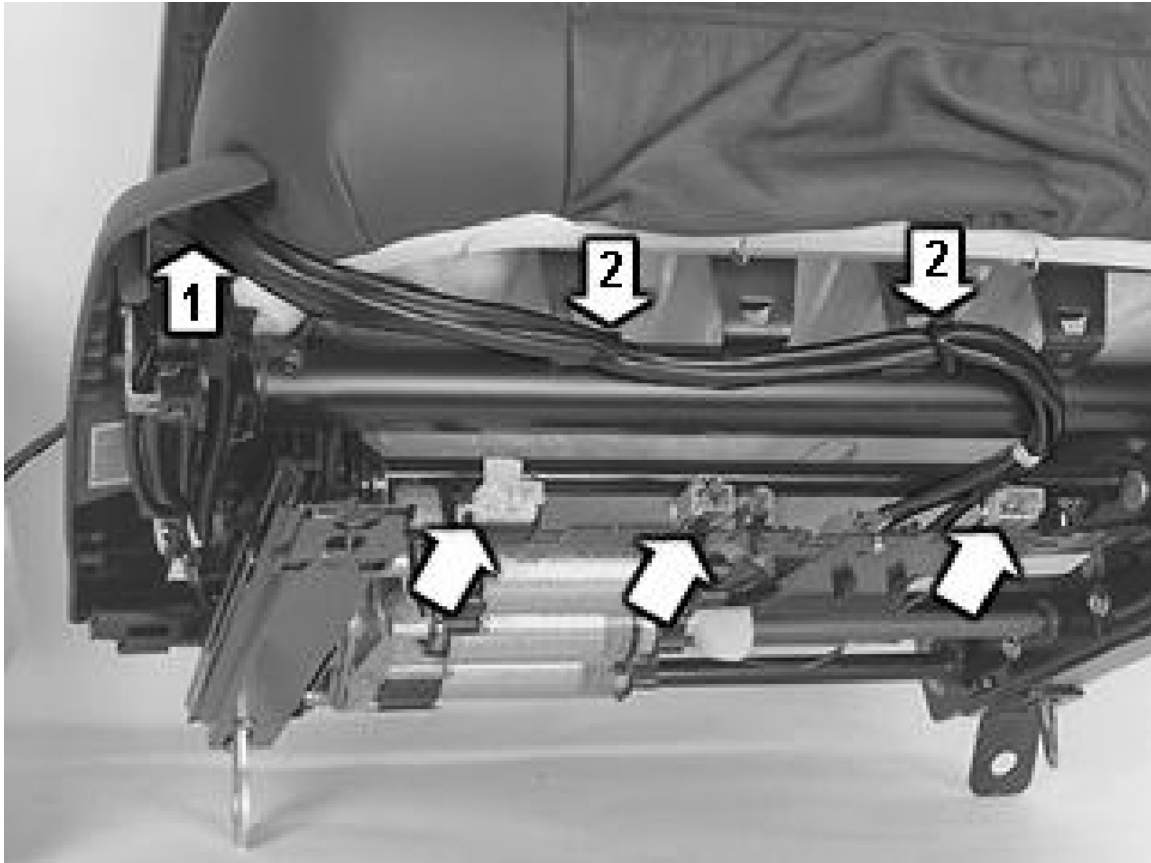

Remove tie strap (1).

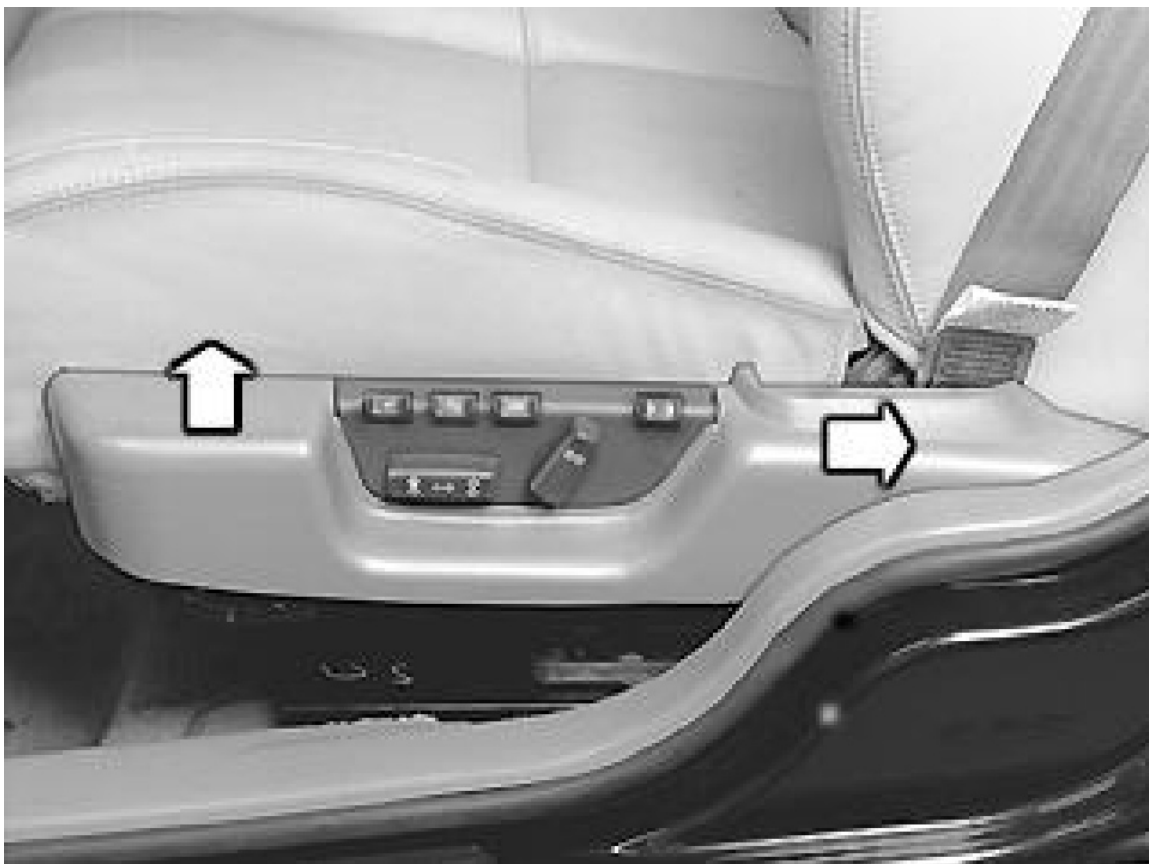


- Lift the front edge of the side panel.
- Pull the side panel backwards.


**Install:**

In reverse order

**Remove:**

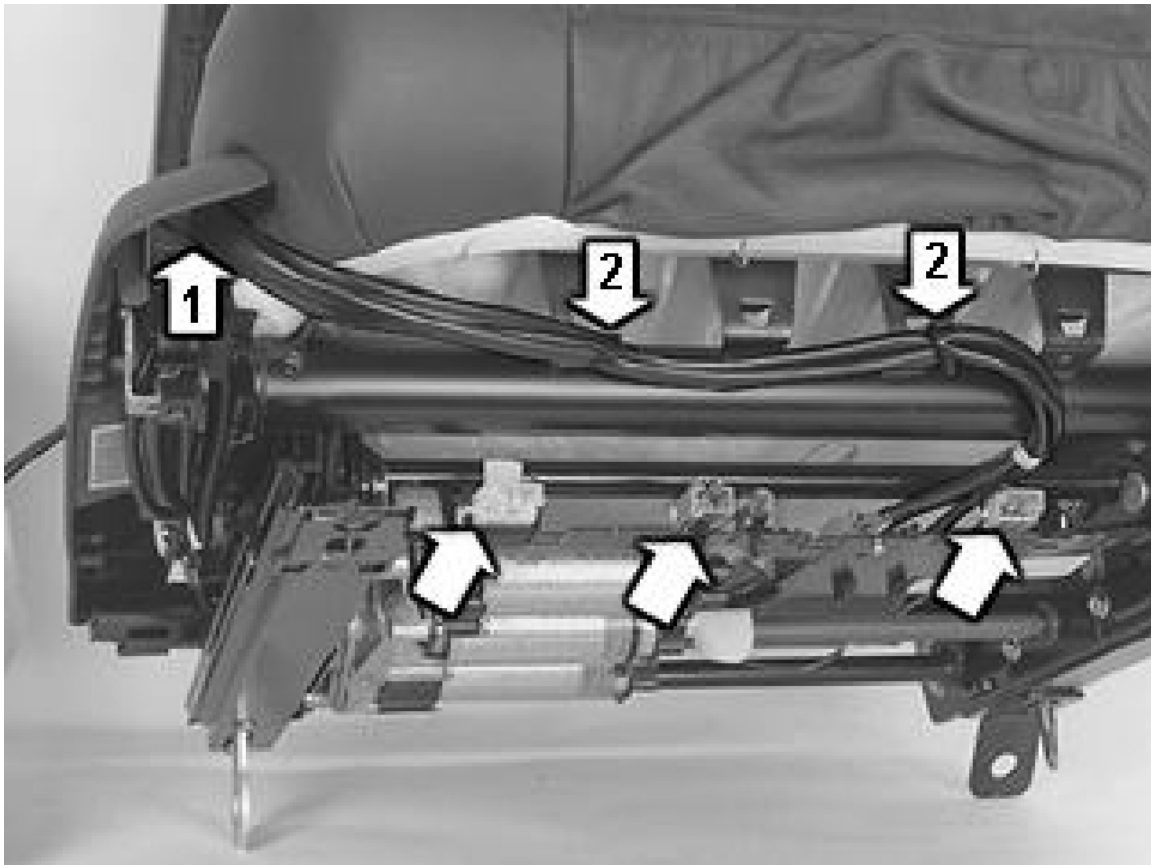

- side panel
- three connectors.
- two tie straps (2).

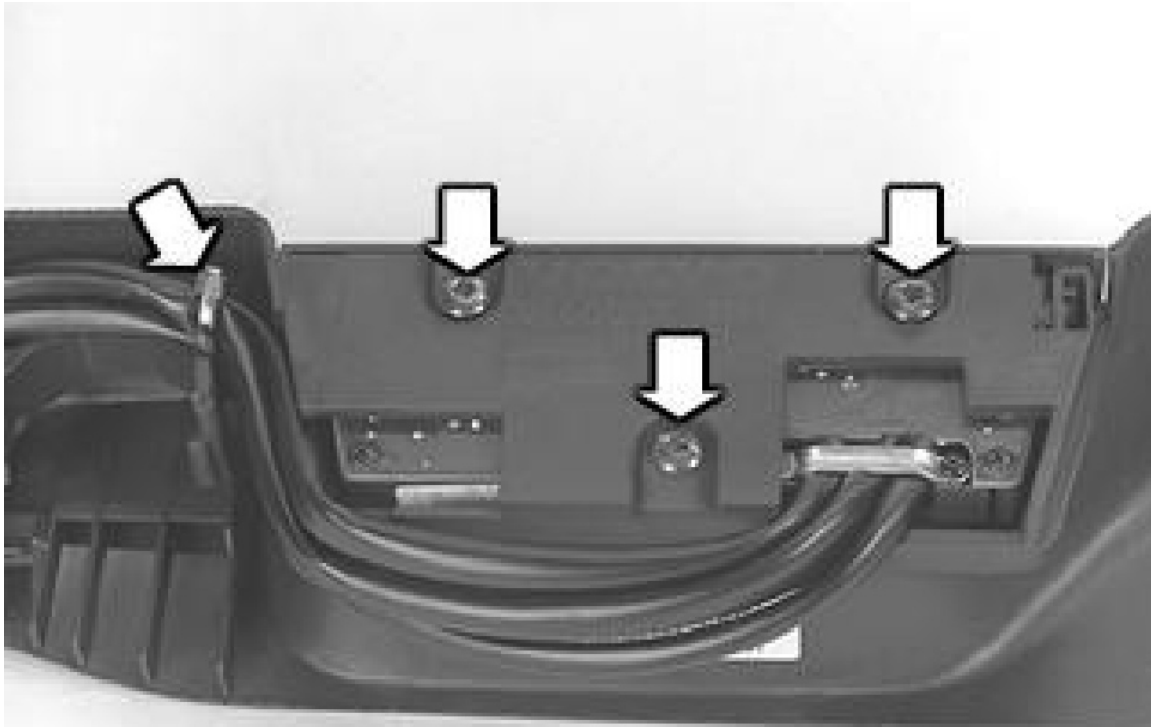

- a tie strap.
- three screws.

Lift control panel straight up.

Remove control panel.

**Install:**

In reverse order.